


# OVERHEAD TRACK SCALE



**CHOICE OF  
INDICATORS**

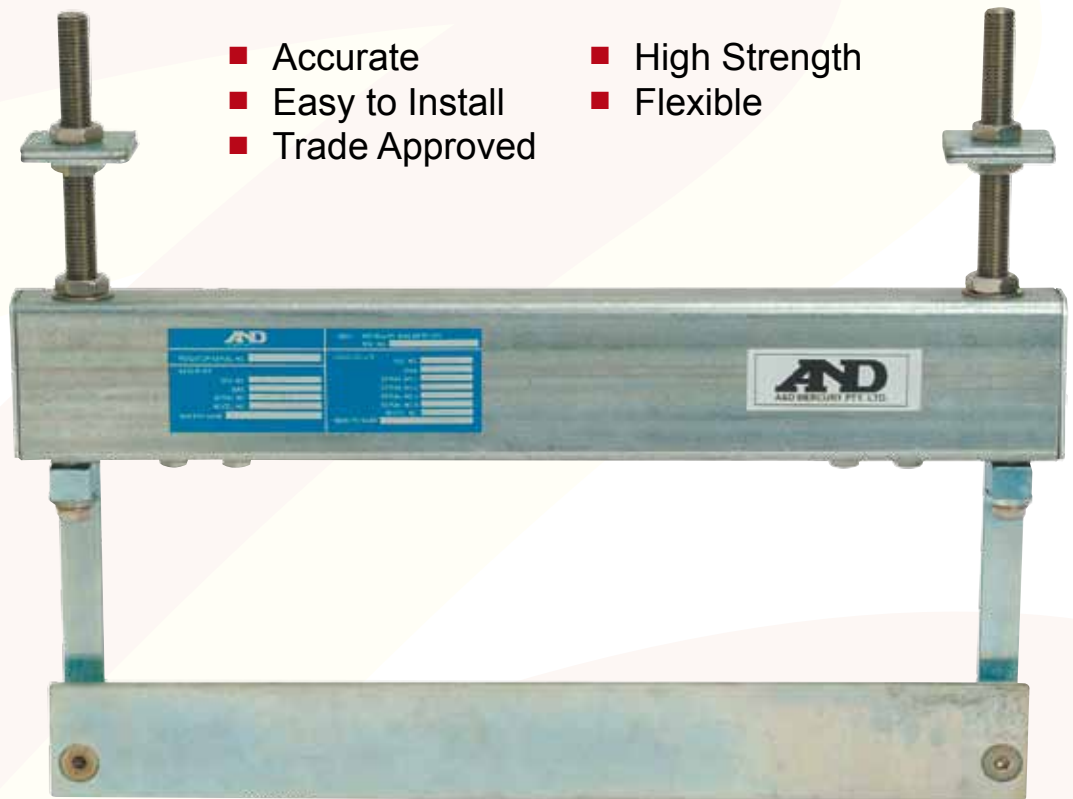

- Accurate
- Easy to Install
- Trade Approved
- High Strength
- Flexible

## FEATURES

- Trade Approved (NMI 6/18/17B)
- Maximum Capacity 600kg
- Galvanised Finish
- Simple Installation
- Strong, Robust Design with up to 300% Overload Protection.
- Standard Track Sizes to Suit Customer Requirements (300mm -1200mm).
- Waterproof Track Scale for Wet Environments
- Centre and End Load Compensation Feature for Accurate Weighing
- Choice of Indicators to Suit Various Environments/Applications
- Choice of Optional Bracket Lengths
- Can be used with hooks, slides and pulley hook assemblies

## SPECIFICATIONS

- Capacity: Up to 600kg Maximum
- Standard Rail Sizes: 300mm to 1200mm (Non-Standard Sizes Upon Request)
- Loadcells: Shear Beam Type (1t Capacity)
- Weigh Rail Thickness: 12mm



by **AD**  
A&D MERCURY PTY LTD

**Accuweigh Pty Ltd**

WESTERN AUSTRALIA (HEAD OFFICE):  
PHONE: (08) 9259 5535

SOUTH AUSTRALIA OFFICE:  
PHONE: (08) 8447 5011

NEW SOUTH WALES (SYDNEY) OFFICE:  
PHONE: (02) 9728 4877



**ACCUWEIGH**

[www.accuweigh.com.au](http://www.accuweigh.com.au)

VICTORIA OFFICE:  
PHONE: (03) 9548 5554

NEW SOUTH WALES (NEWCASTLE) OFFICE:  
PHONE: (02) 4966 8900

QUEENSLAND OFFICE:  
PHONE: (07) 3265 5520