

CHECKWEIGHER MODEL 35D3

OVERVIEW

The AccuCheck 35D3 is a Checkweigher for tinplate, glass, bottles and funnels and operates at medium to low speeds. The AccuCheck 35D3 runs alongside the existing line and utilises a star with alternating movement to transport the product. Made in stainless steel, it features an IP-65/67 protection level. The system is fitted with an expulsion unit and removable housing for changing the format.

HIGHLIGHTS

- Digital Electronics with Alphanumeric Graphic Display Panel
- Electronic Self-Calibration Device
- Production Data Management in Conformity with the Standards in Force
- Speed Adjustable from Keypad
- Mobile Average Function
- 100 Storable Product Programs
- RS-232 Serial Port
- Ejection System
- Infeed Automatic Synchronisation System
- Protection Tunnel with Inspection Door

OPTIONS


- Feedback Function
- 24-Column Panel Printer
- Data Collection via Ethernet Network
- Conformity with Standards ISO-FDA-HACCP



SPECIFICATIONS

Capacity	1,500g
Throughput	Up to 100 Pieces/Minute
Display Division	0.1g or 1g
Accuracy	±0.1g
Pneumatic Supply	0.6MPa
Air Consumption (for Ejection System)	2NI
Power Supply	380VAC 50/60Hz Three-Phase
Power Consumption	700W
Finishes	Stainless Steel IP66

DIMENSIONS

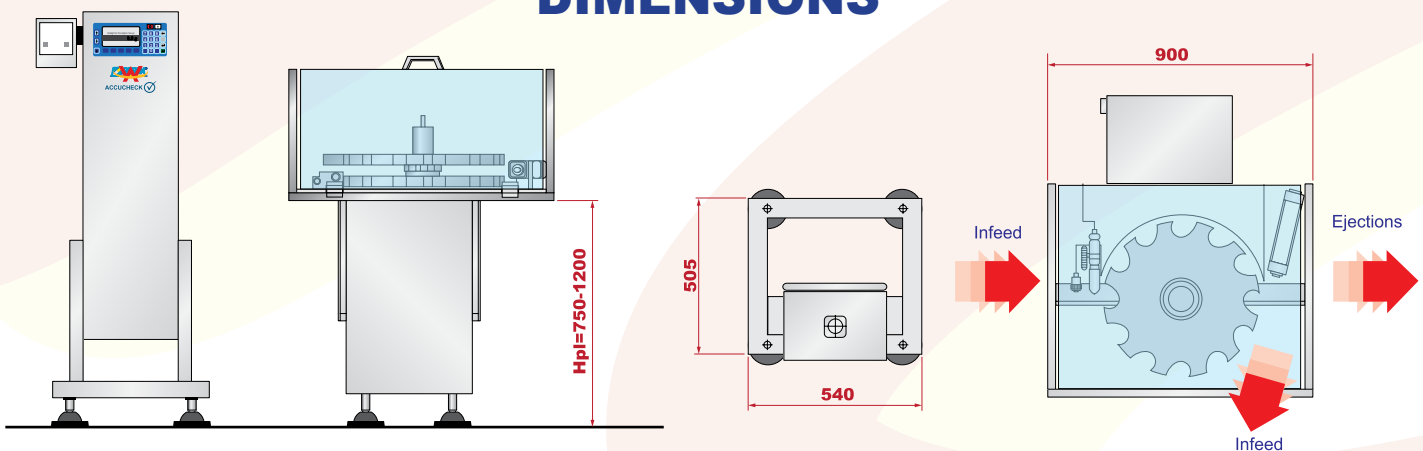

Accuweigh Pty Ltd

WESTERN AUSTRALIA (HEAD OFFICE):
PHONE: (08) 9259 5535

SOUTH AUSTRALIA OFFICE:
PHONE: (08) 8447 5011

NEW SOUTH WALES (SYDNEY) OFFICE:
PHONE: (02) 9728 4877



www.accuweigh.com.au

VICTORIA OFFICE:
PHONE: (03) 9548 5554

NEW SOUTH WALES (NEWCASTLE) OFFICE:
PHONE: (02) 4966 8900

QUEENSLAND OFFICE:
PHONE: (07) 3265 5520